

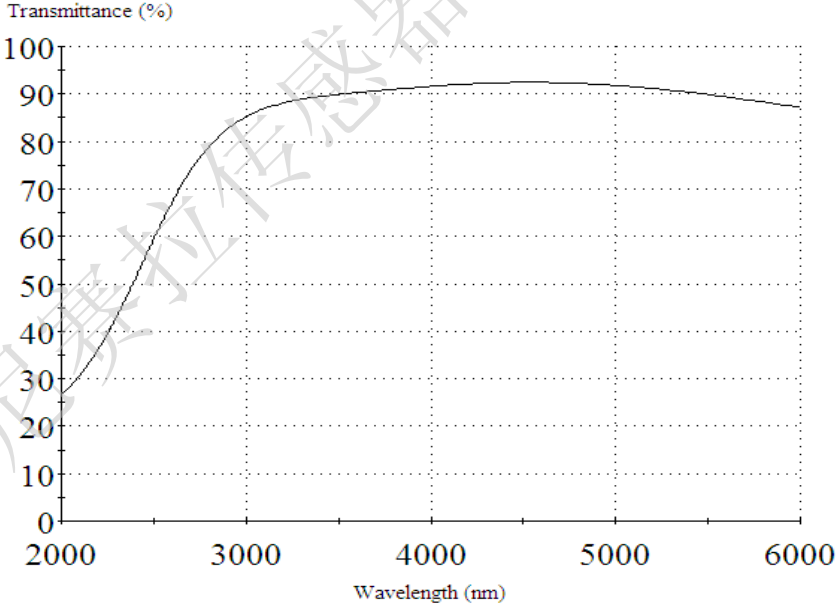
3-5 μ m 红外增透膜

3-5 μ m AR

产品介绍

可作为各类温度测量窗口。

技术指标

镀膜基片	单晶硅片，直径 3&4 英寸，厚度 0.38~0.5mm，可定制。
透过率	3~5 μ m 范围内平均透过率 $T \geq 80\%$ 注：平均透过率按基片材料、厚度不同略有变化。
光谱曲线	 <p>The graph plots Transmittance (%) on the y-axis (0 to 100) against Wavelength (nm) on the x-axis (2000 to 6000). The curve starts at approximately 30% at 2000 nm, rises to about 85% at 3000 nm, reaches a peak of approximately 95% between 4000 nm and 5000 nm, and then slightly declines to about 88% at 6000 nm.</p>

联系我们

上海尼赛拉传感器有限公司 滤光片部

E-mail: linjiehua@china-sns.com Tel: 021 - 65928541